

STREAMLITE™ Wet Location 24V

Diffused Linear Light

Dot-free linear lighting without any visible LEDs. Ideal for tight spaces and simple, impactful installations. Suitable for wet locations (IP65).

Date _____

Project Notes _____

FEATURES

- Uniform, diffused light appears dotless even without a diffusing lens
- Very small size, ideal for tight spaces
- 180° beam angle for even light distribution
- Compatible with channels and other popular accessories
- Suitable for wet locations (IP65)
- Includes (1) open and (1) closed end cap



ORDERING CODES

Order spools, and components for field assembly

OPTIONAL ORDERING CODES

Mounting, drivers, and assembly preference

Diode LED	Voltage	Model	CCT	Length	Channels			Finish	Mounting		Driver		Delivery
DI													
	24V	STMLT STMLT4	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	016 (16.4) ft.	SL (Slim) CA (Canal) S1 (S1) 16 (16mm) SQ (Square)	45 (45°) 90 (90° Sideview) REF (Reflector) MI1 (1-inch Mud-In) MI2 (2-inch Mud-In)	REC (Recessed) WF (Waveform) SCNC (Sconce)	AL (Aluminum) WH (White) BL (Black)	3M (3M Adhesive) MC (Mounting Clip) UC (U-Clip)	VC (Vertical Clip) HNG (Hanging Hardware) RC (Rotating Clip)	ELV (Electronic) O10 (0-10V) MAG (Magnetic) SWX (Switchex)	O/O (On / Off) LUT (Lutron) PoE (Power over Ethernet)	FIELD HYBRID FACTORY *See Delivery Options

Model	24V-STMLT-W	24V-STMLT4-W
Voltage	24V	24V
Wattage	3.3 W/ft.	5 W/ft.
Lumens	2700K 221/ft.	376/ft.
	3000K 256/ft.	378/ft.
	3500K 275/ft.	400/ft.
	4000K 271/ft.	440/ft.
Cut Points	1.8 in.	1.8 in.
Max Run (ft.)	16.4 ft.	16.4 ft.
Max Run (Class 2)	29 ft.	19 ft.
LED Chips	176/ft.	176/ft.
CRI	90+	90+
Dimensions	0.4 in. x 0.16 in. (W x H)	0.4 in. x 0.16 in. (W x H)
Environment	Outdoor / Wet Location (IP65)	Outdoor / Wet Location (IP65)
Ambient Temperature	-4 ~ 122°F (-20 ~ 50°C)	-4 ~ 122°F (-20 ~ 50°C)
Operating Temperature	-4 ~ 176°F (-20 ~ 80°C)	-4 ~ 176°F (-20 ~ 80°C)
Certification	UL Listed 2108	UL Listed 2108
Warranty	7 Year	7 Year

STREAMLITE™ Wet Location 24V Diffused Linear Light

Dot-free linear lighting without any visible LEDs. Ideal for tight spaces and simple, impactful installations. Suitable for wet locations (IP65).

Date _____














Project Notes _____

RECOMMENDED DRIVERS

SKU	WATTAGE	LENGTH	WIDTH	HEIGHT
OMNIDRIVE® X Dimmable Driver Versatile driver for most high-performance dimming applications. Dims to dark depending on installation.				
DI-ODX-24V30W-J	30W	6.5 in.	3.7 in.	1.36 in.
DI-ODX-24V60W-J	60W	7.4 in.	3.7 in.	1.36 in.
DI-ODX-24V96W-J	96W	8.66 in.	3.7 in.	1.36 in.
DI-ODX-24V120W-J	120W	8.66 in.	3.7 in.	1.36 in.
DI-ODX-24V200W-J	200W	10.24 in.	4.92 in.	1.95 in.
SWITCHEX® Driver and Dimmer Switch LED driver and dimmer switch combined in a single gang box. Simplify your installation and save labor costs.				
DI-24V-SE-60W	60W	1.4 in.	2.1 in.	4.1 in.
DI-24V-SE-100W	100W	1.4 in.	2.1 in.	4.1 in.
VLM Series Constant Voltage Drivers Compact constant-voltage LED driver				
VLM60W-24-LPM	60W	8.19 in.	2.94 in.	1.31 in.
VLM100W-24-LPM	100W	8.19 in.	2.94 in.	1.31 in.
LUTRON® Hi-Lume 1% Dimmable LED Drivers High-performance dimming on Lutron control systems.				
DI-DM-24V40W-L3D	40W	4.89 in.	4 in.	2.62 in.
DI-DM-24V40W-LTE	40W	4.89 in.	4 in.	2.62 in.
LUTRON® Hi-Lume Premier 0.1% LED Driver High-performance dimming on Lutron control systems.				
DI-DM-24V96W-L3D	96W	5.5 in.	2.2 in.	10.5 in.
PoE 24V constant voltage platform, ready for Power over Ethernet (Inquire)				



RECOMMENDED CHANNELS

MODEL	SKU	SOLDERED CONNECTION	IN CHANNEL DIFFUSION	DIAGRAM
Slim (SL) 48", 96" Aluminum, White, Black	DI-CPCHB-SL	Soldered Lead Only	STMLT, STMLT4: Dotless	
Canal (CA) 48", 96" Aluminum, White, Black	DI-CPCHB-CAN	Soldered Lead Only	STMLT, STMLT4: Dotless	
S1 (S1) 48", 96" Aluminum	DI-CPCHB-S1	Soldered Lead Only	STMLT, STMLT4: Dotless	
16mm (16) 48", 96" Aluminum	DI-CPCHB-16MM	Soldered Lead Only	STMLT, STMLT4: Dotless	
Square (SQ) 48", 96" Aluminum, White, Black	DI-CPCHB-SQ	Soldered Lead Only	STMLT, STMLT4: Dotless	
45° (45) 48", 96" Aluminum, White, Black	DI-CPCHB-45	Soldered Lead Only	STMLT, STMLT4: Dotless	
90° Sideview (90) 48", 96" Aluminum	DI-CPCHB-90SD	Soldered Lead Only	STMLT, STMLT4: Dotless	
Reflector (REF) 48", 96" Aluminum	DI-CPCHB-RFCTR	Soldered Lead Only	STMLT, STMLT4: Dotless	
1-inch Mud-In (M1) 48", 96" Aluminum	DI-CPCHB-MUD1	Soldered Lead Only	STMLT, STMLT4: Dotless	
2-inch Mud-In (M2) 48", 96" Aluminum	DI-CPCHB-MUD2	Soldered Lead Only	STMLT, STMLT4: Dotless	
Recessed (REC) 48", 96" Aluminum	DI-CPCHB-REC	Soldered Lead Only	STMLT, STMLT4: Dotless	
Waveform (WF) 48" Aluminum	DI-CPCHB-WF	Soldered Lead Only	STMLT, STMLT4: Dotless	
Sconce (SCNC) 48", 96" Aluminum	DI-CPCHB-SCNC	Soldered Lead Only	STMLT, STMLT4: Dotless	

STREAMLITE™ Wet Location 24V Diffused Linear Light

Dot-free linear lighting without any visible LEDs. Ideal for tight spaces and simple, impactful installations. Suitable for wet locations (IP65).

Date _____

Project Notes _____

MECHANICAL DIAGRAMS

24V-STMLT-W

24V-STMLT4-W



CONNECTIONS



STREAMLITE™ Wet Location 24V Diffused Linear Light

Dot-free linear lighting without any visible LEDs. Ideal for tight spaces and simple, impactful installations. Suitable for wet locations (IP65).


Date _____

Project Notes _____

ACCESSORIES


DI-WL-EC (Closed End Cap)

Terminal Closed End Cap

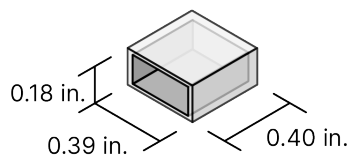

DI-WL-EC (Open End Cap)


Terminal Open End Cap



*Note: Dimensions of end caps stretch to 0.48 in. x 0.26 in. once affixed to strip light. (See Mechanical Diagram)

DI-0754 Mounting Clip

Wet Location Mounting Clip



DELIVERY OPTIONS

• Field Assembly

Stock items for in-field assembly. Fastest order fulfillment.

• Factory + Field (Hybrid)

Finished lengths of light with leads. Channels either bulk or factory finished. Some field assembly required.

• Factory Assembly

Fastest installation: fixtures fully assembled in the factory.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.

STREAMLITE™ Wet Location 24V

Diffused Linear Light

Dot-free linear lighting without any visible LEDs. Ideal for tight spaces and simple, impactful installations. Suitable for wet locations (IP65).

Date _____

Project Notes _____

CERTIFICATIONS

Safety

- UL Listed 2108 Flexible Lighting Systems. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.

Performance

- Can be used to comply with TITLE 24 Part 6 High efficacy LED requirements - JA8-2019-E
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

WARRANTY

Limited Warranty

- 7 Years

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.