

# faedra™

## SMART DIMMER


For Standard Wallplate



**ON—Bright**  
Shows Light Level

**OFF—Dim**  
Night Light Shows  
Preset Level

LED

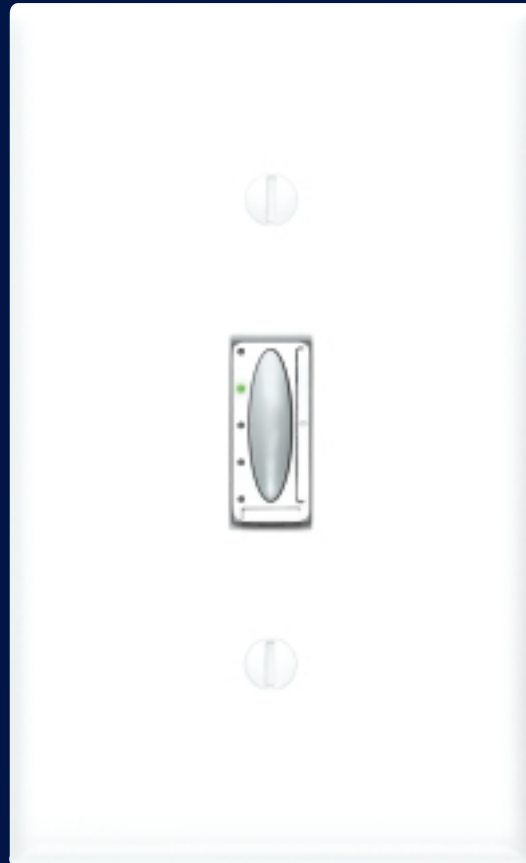

Tap On  
Tap Off

Raise  
Lower

- Up to 60 second Fade-to-Off
  - Lights your way
  - Go to another room
  - Go to bed

**NEW!**

- 500W Electronic Low Voltage Dimmer
- Matching Electronic Switch
- Winter White Color

### Control From Single or Multiple Locations

#### Single-Location



Smart Dimmer or  
Electronic Switch


#### Multi-Location



Smart Dimmer or  
Electronic Switch



Accessory Dimmer  
or Accessory Switch

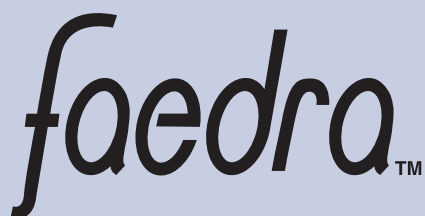


## Faedra Features

- Traditional styling for a standard wallplate
- Uses standard wiring
- Power Failure Memory restores lights to prior levels after power interruptions

## Dimmer Operation

- Tap once: Preset intensity
- Tap twice: Full intensity
- LED indicates light level status and night light
- The rocker provides continuous, full-range dimming

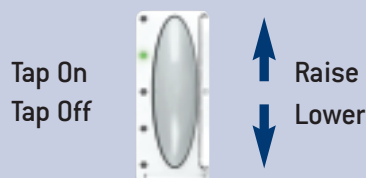

- Fade-to-Off; press button and hold for  
1 sec. — 10 sec. fade  
2 sec. — 20 sec. fade  
⋮  
6 sec. — 60 sec. fade

## Switch Operation

- Tap On/Tap Off
- LED indicates on/off and night light



## Ordering Guide

Boxed product model numbers shown.

For clamshell products add H- to the model number, ie: FA-600H-WH. All products are not available in clamshells, consult Customer Service.

Model Number	Type	Capacity
<b>Incandescent/Halogen (120V) Dimmers</b>		
FA-600-	single-location	600W
FA-600M-	multi-location use with accessory dimmer	600W
FA-1000-	single-location	1000W
FA-1000M-	multi-location use with accessory dimmer	1000W

### Magnetic Low-Voltage Dimmers

FALV-600-	single-location	600VA (450W)
FALV-600M-	multi-location use with accessory dimmer	600VA (450W)
FALV-1000-	single-location	1000VA (800W)
FALV-1000M-	multi-location use with accessory dimmer	1000VA (800W)

### NEW Electronic Low-Voltage Dimmers

FAELV-500-	single-location	500W
FAELV-500M-	multi-location use with accessory dimmer	500W

### Accessory Dimmer (Does not include LED indicators)

FA-AD-	use with multi-location Faedra dimmers	N/A
--------	---	-----

### NEW Electronic Switches for Lighting Loads

FA-S6A-	single-location	6A
FA-S6AM-	multi-location use with accessory switch	6A

### NEW Accessory Switch (Does not include LED indicators)

FA-AS-	use with multi-location Faedra electronic switches	N/A
--------	---	-----

## Colors

White (WH) White dimmer with light gray tap button

Ivory (IV) Ivory dimmer with dark beige tap button

Winter White (WW) White dimmer with white tap button



**Certified to ISO 9001 Quality Standard**

Lutron Electronics Co., Inc.  
7200 Suter Road  
Coopersburg, PA 18036-1299 U.S.A.

[www.lutron.com/faedra](http://www.lutron.com/faedra)

**Worldwide Technical and Sales Assistance**

**U.S.A. and Canada 1-800-523-9466**

Mexico 001-888-235-2910

Other countries +1-610-282-3800

