


LEDme™ BUTTON LIGHT DIMMABLE POWER SUPPLY

MODEL LED-350MA

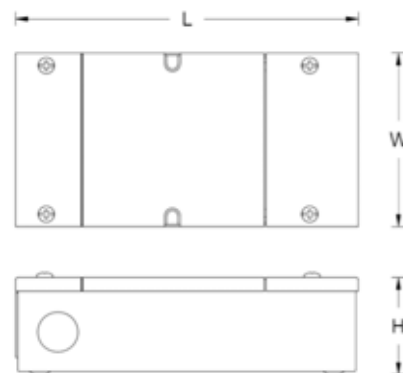

Ordering Matrix

LED Power supply	Constant current	Wattage	Dimmable	Remote Box
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
LED	350MA	09 = 9W 12 = 12W	DIM	RB

Ordering Example (Model-Finish) : LED-350MA09-DIM-RB

Product Details

Description:	Compact and reliable class 2 constant current LED dimmable power unit for up to four HR-LED85 button lights		
Input Voltage:	120V AC 60Hz		
Input Current:	LED-350MA09- DIM -RB	0.15A max	
	LED-350MA12- DIM -RB	0.2A max	
Output Voltage:	12V DC		
Output Current:	350mA DC constant current		
Load:	LED-350MA09-DIM -RB	3PCS 3x1W LED Fixtures	
	LED-350MA12-DIM -RB	4PCS 3x1W LED Fixtures	
Dimension	LED-350MA09- DIM -RB	L×W×H = 6 3/5"x 3 1/5" x 1 4/5"	
	LED-350MA12- DIM -RB	L×W×H = 6 3/5"x 3 1/5" x 1 4/5"	
Loading Wire:	22 AWG 6ft maximum length		

Specification Features

- 350mA Constant Current optimized for LED's and stable performance.
- "Plug and Play" terminal blocks for wiring up to four HR-LED85 LED button lights.
- Open circuit and short circuit protection.
- Recommended Magnetic Low-voltage dimmer to drive LEDs (Example: LUTRON SLV-600P)
- 5 year WAC Lighting product warranty