


LED SPOTLIGHT CANLESS REGRESSED DOWNLIGHT - 5 CCT SELECTABLE 3", 4" - ROUND & SQUARE

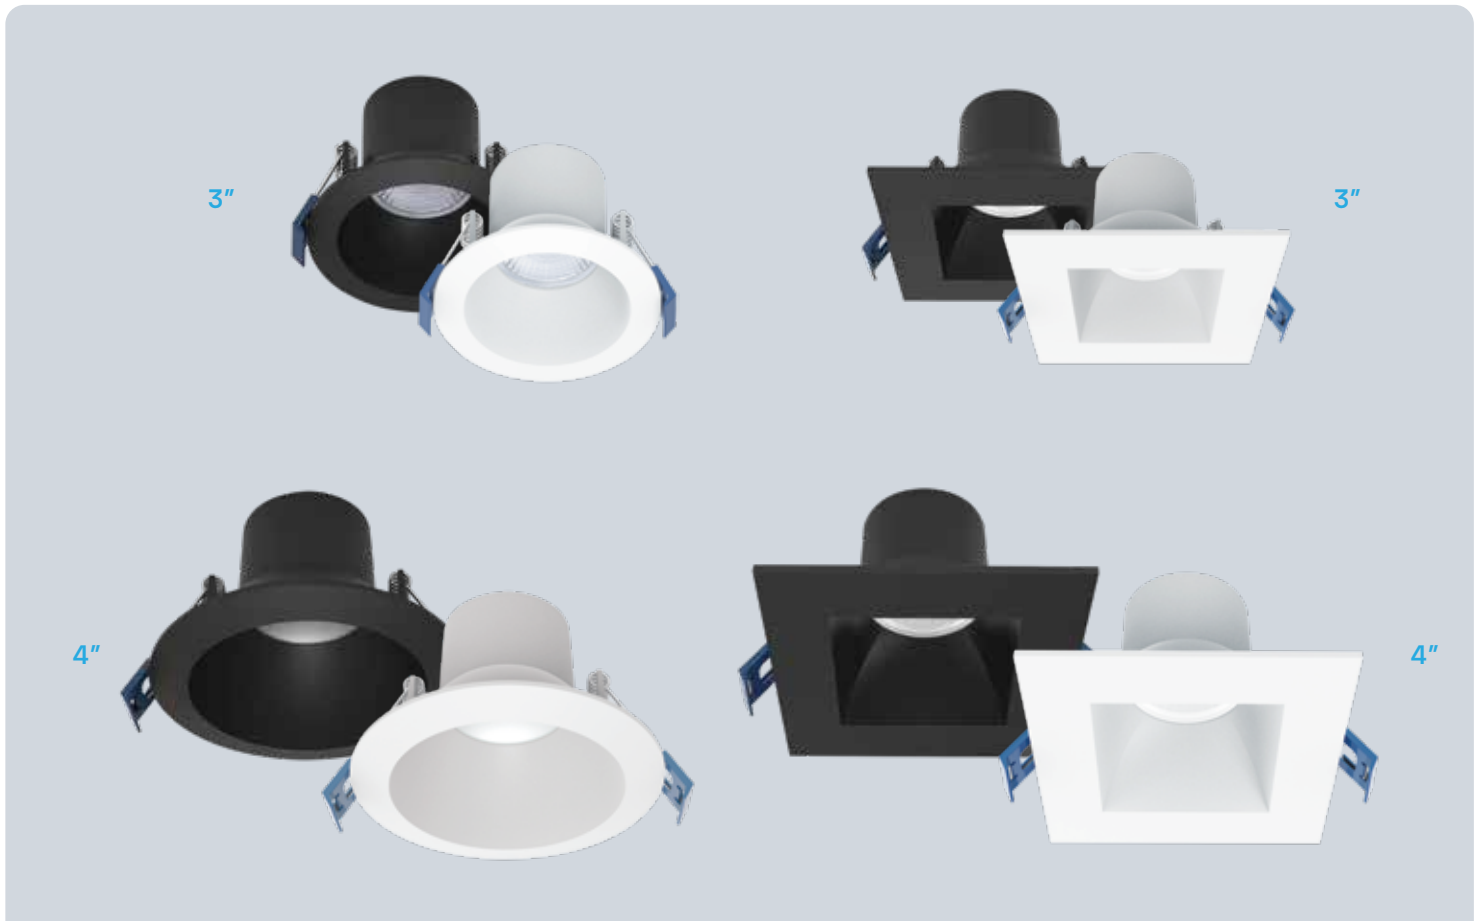

**CRI
90**

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

DIMMABLE





BEAM
SPREAD
45°

120V

IC
RATED

WET
LOCATION
RATED

3
YEAR
WARRANTY

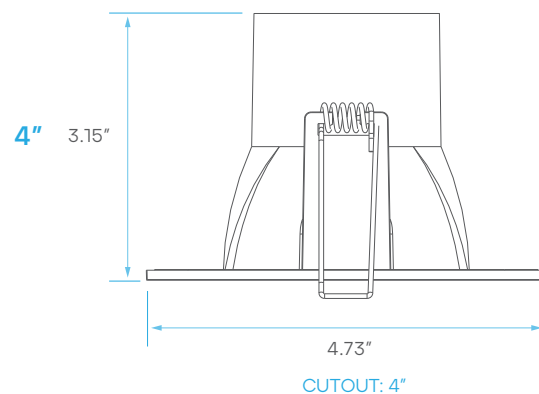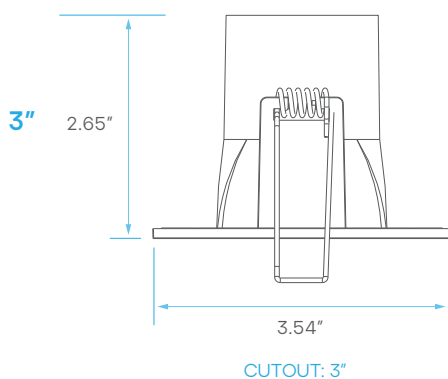

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
3"	ROUND WHITE	LR23320	LED/RDL3/5CCT/RD/WT2	8	120V	105	50,000	\$ 0.96
	ROUND BLACK	LR23321	LED/RDL3/5CCT/RD/BK2	8	120V	80	50,000	\$ 0.96
	SQUARE WHITE	LR23322	LED/RDL3/5CCT/SQ/WT2	8	120V	93	50,000	\$ 0.96
	SQUARE BLACK	LR23323	LED/RDL3/5CCT/SQ/BK2	8	120V	66	50,000	\$ 0.96
4"	ROUND WHITE	LR23325	LED/RDL4/5CCT/RD/WT2	12	120V	97	50,000	\$ 1.44
	ROUND BLACK	LR23326	LED/RDL4/5CCT/RD/BK2	12	120V	80	50,000	\$ 1.44
	SQUARE WHITE	LR23327	LED/RDL4/5CCT/SQ/WT2	12	120V	88	50,000	\$ 1.44
	SQUARE BLACK	LR23328	LED/RDL4/5CCT/SQ/BK2	12	120V	70	50,000	\$ 1.44

PHOTOMETRIC



MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	PLATE (KNOCKOUT)
LR23320	LED/RDL3/5CCT/RD/WT2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	840	90	45°	YES	LR41004 (#1)
LR23321	LED/RDL3/5CCT/RD/BK2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	640	90	45°	YES	LR41010 (L1)
LR23322	LED/RDL3/5CCT/SQ/WT2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	740	90	45°	YES	LR41005 (#0)
LR23323	LED/RDL3/5CCT/SQ/BK2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	530	90	45°	YES	LR41005 (#0)
LR23325	LED/RDL4/5CCT/RD/WT2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1160	90	45°	YES	LR41004 (#2)
LR23326	LED/RDL4/5CCT/RD/BK2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	960	90	45°	YES	LR41006 (#2)
LR23327	LED/RDL4/5CCT/SQ/WT2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1060	90	45°	YES	LR41005 (#1)
LR23328	LED/RDL4/5CCT/SQ/BK2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	840	90	45°	YES	LR41005 (#1)

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver




LR41005
New Construction
Mounting Plate





KNOCKOUT SIZE	
#0	2.75"x2.75" (70 mm)
#1	4.25"x4.25" (108 mm)
#2	6.29"x6.29" (160 mm)

LR41004
New Construction
Mounting Plate



KNOCKOUT SIZE	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41006
New Construction
Mounting Plate




KNOCKOUT SIZE	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LR41010
New Construction
Mounting Plate



KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)



KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)