

Project:	Туре:
Prepared By:	Date:

Technical Specifications

Listings

CSA Listed:

Suitable for wet locations

Construction

Description:

Steel pole 6" taper 11 gauge 15 foot welded tenon square base

Base Shaft Diameter:

6"

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

Slotted base plates 36,000 p.s.i.

Color:

Bronze powder coating

Tenon:

Welded 2 3/8" tenon included

Height:

15 FT

Gauge:

11

Wall Thickness:

1/8"

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available online.

Maximum EPAs/Maximum Weights:

70MPH: 26.2 ft./600 lb. 80MPH: 19.4 ft./500 lb. 90MPH: 13.6 ft./500 lb. 100MPH: 11.2 ft./500 lb. 110MPH: 8.1 ft./495 lb. 120MPH: 6.7 ft./490 lb. 130MPH: 5.3 ft./450 lb. 140MPH: 4.1 ft./450 lb. 150MPH: 3.2 ft./440 lb.

Accessories:

Base/Cap: <u>BASE-RT6</u> Anchor Bolts: <u>BOLT5-8</u>


Other

Terms of Sale:

Pole Terms of Sale is available online.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

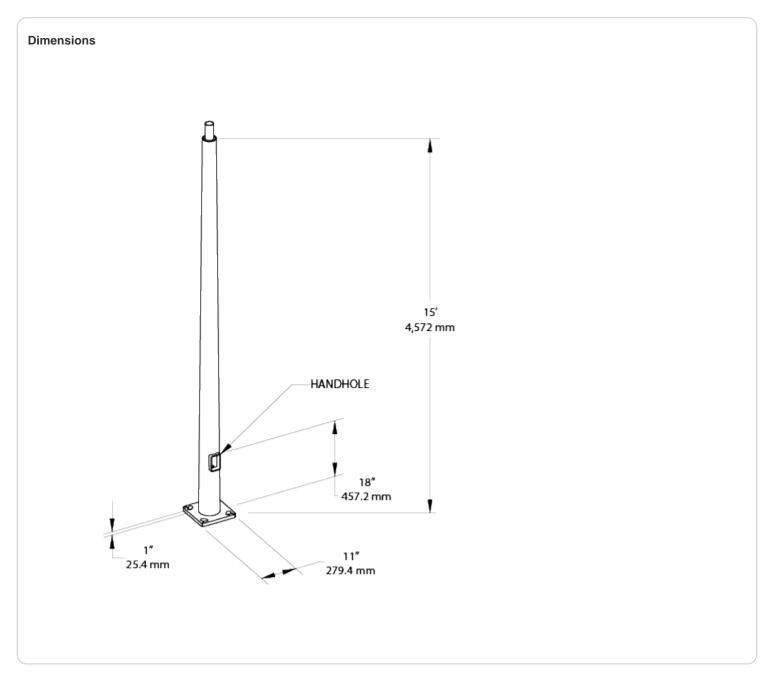

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
Р	TR	6	11	15	WT
	R = Round TR = Taped Round	4 = 4" 5 = 5" 6 = 6" 7 = 7" 8 = 8"		10 = 10' 15 = 15' 20 = 20' 25 = 25' 30 = 30'	D2 = Drilled WT = Welded Tenon