



LED bollard with architectural quality and strength at an affordable price point. Square post and head. Available in 12, 18 and 24 Watt versions that provide 90, 180, 270 and 360 degree lighting patterns.

Color: Black

Weight: 10.2 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| Type | Constant Current |
|-------------|------------------|
| 120V | 0.13A |
| 208V | 0.09A |
| 240V | 0.08A |
| 277V | 0.07A |
| Input Watts | 12.1W |

LED Info

| | |
|----------------|-----------------|
| Watts | 12W |
| Color Temp | 4000K (Neutral) |
| Color Accuracy | 72 CRI |
| L70 Lifespan | 100,000 Hours |
| Lumens | 1,306 |
| Efficacy | 107.9 lm/W |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for mounting within 4 ft. (1.2m) of the ground.

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PDUJS2C

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Color Consistency:

5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Optical

BUG Rating:

B1 U2 G1

Construction

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Thermal Management:

Cast aluminum Thermal Management system for optimal heat sinking. The BLED is designed for cool operation, maximum efficiency and long life by minimizing LED junction temperature.

Housing:

Die-cast aluminum with extruded aluminum post

Lens:

Frosted vandal resistant polycarbonate

Reflector:

Vacuum-metalized polycarbonate

Technical Specifications (continued)

Construction

Mounting:

Four (4) anchor bolts provided for concrete pad mounting. Internal base support has leveling screws.

Gaskets:

High-temperature silicone gaskets seal out moisture gaskets seal out moisture

Anchor Bolt:

Anchor Bolt Dimension is available [here](#).

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Other

Patents:

The design of BLED is protected by patents in US, Canada & China

Replacement:

Replaces up to 50W Metal Halide

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class2, 100-277V, 50/60 Hz, 4kV Surge Protection, 700mA, 120V: 0.13A, 208V: 0.09A, 240V: 0.08A, 277V: 0.07A


THD:

12.4% at 120V, 22.6% at 277V

Power Factor:

97.6% at 120V, 89.5% at 277V

Dimensions

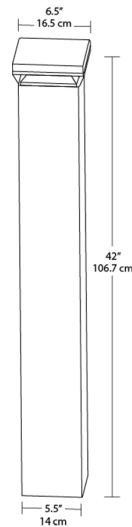

Features

Patented base mount design for super sturdy installation

Durable construction and frosted vandal-resistant polycarbonate lens

4 configurations to provide 360°(24W), 270°(18W), 180°(12W) or 90°(12W) lighting pattern

Precision-engineered optics deliver maximum downward lighting without glare

Four leveling screws provided for easy installation

100,000-hour LED lifespan

Ordering Matrix

| Family | Wattage | Color Temp | Finish | | Distribution | Voltage | Dimming | Backup |
|--------|----------------------------------|---|--|---|---|---|---|---|
| BLED | 12 | N | K | - | 180 | | | |
| | 12 = 12W 18 = 18W 24 = 24W | Blank = 5000K (Cool) N = 4000K (Neutral) Y = 3000K (Warm) | Blank = Bronze W = White K = Black | | Blank = Standard ¹ 180 = 180 degrees (12W only) | Blank = No Option (120-277V) /480 = 480V (24W only) ² | Blank = None (Standard) /D10 = 0-10V Dimming | Blank = No Battery Backup /E = Battery Backup (24W only) ³ /EC = Battery Backup Cold Weather (24W only) ³ |

¹ Standard Distributions: 24W = 360Â°, 18W = 270Â°, 12W = 90Â° *

² 480VAC available for 24W fixture versions - offered with /D10 dimming option as standard

³ Only for 24W, 120-277VAC fixture versions