




# EXIT series

Exit / Exit & Emergency Fixture

The greenbeam EXIT Series is slim in profile and available either as a stand alone Exit, or an Exit emergency combination with full adjustable LED lamp heads & have an option of red or green. The LED Exit design provides reliable, uniform illumination in a contemporary package. This contemporary design offers long-life, dependable service a snap-in canopy is included for easy top mount installations.



# Specifications

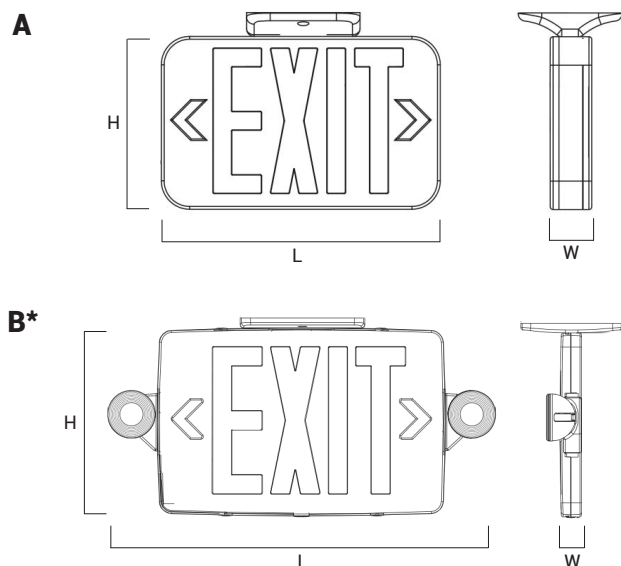

Construction	Injection-molded flame-retardant, high-impact resistant thermoplastic enclosure
Lettering	Fully-illuminated 6" characters with 3/4" stroke
Input Voltage	120 -277V AC
Input Frequency	60Hz
Efficacy Lm/W	83.5 (Emergency Lights)*
Operating Temperatures	14°F to 104°F
Environment	IP 54 Damp Location & IP 64 Waterproof
Rated Life	50,000 Hours
Certification	UL, OSHA
Warranty	3 Year Limited

	MODEL	DIMENSIONS	LETTER ILLUMINATION WATTS	EMERGENCY ILLUMINATION WATTS
A	EX621	L 11 4/5" - W 4/5" - H 7 1/4"	2.9	-
B	EX622*	L 16 9/10" - W 4/5" - H 7 1/4"	2.9	1.5

# Features

- Universal style mounting canopy for side or top mount includes - includes two faceplates
- Emergency lights, 125 lumens per head\*
- UL 924 Listed 90 minute emergency run time, 24 hour recharge time
- Field-selectable directional chevrons

ORDERING GUIDE		
SERIES	MODEL	LETTERING
EX	621 (Exit)	R (Red)
	622 (Exit & Emergency)*	G (Green)
		U (Field selectable Red/Green)

\*Exit & Emergency Combo