


HR-LED421

4" LEDme® Step Baffle Downlight Trim

WAC LIGHTING

Responsible Lighting®

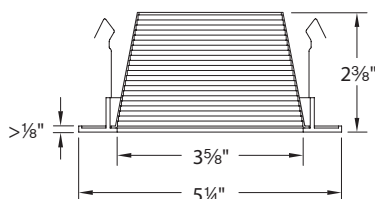

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Round recessed trim with interior step baffle.
For use with HR-LED418 series housings.

FEATURES

- Energy Star®
- Less than 1/8" thick, super low profile die-cast aluminum trim
- Recessed depth from LEDs to trim edge is 2 3/8"
- Narrow flood beam spread
- Deep regression produces a very low glare with 40° cut-off angle
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction.
Three heavy gauge retention clips firmly hold trim to housing.

Light Source: Utilizes six 3W LED's (included with housing).
See individual housing for wattage rating.

Finish: Powder coat paint or plated metal finish.
Available in White baffle w/White trim (WT/WT).

Standards: UL & CUL Listed.


ORDER NUMBER

Model #	Finish	Baffle/Trim
HR-LED421	WT/WT	White/White

HR-LED421 - **WT/WT**

Example: **HR-LED421-WT/WT**

PHOTOMETRY



Beam Angle: 31.4°

COMPATIBLE HOUSINGS (ORDER SEPARATELY)

Rating	Model #	Installation	Color Temp		Watt	Lumens	CRI	Input	Current	Dimensions			Cutout
IC-Rated	HR-LED418-NIC	New Conctruction	27	2700K	10.2W	639	85	120V 50/60Hz	450mA	L: 14½-24½" W: 6¾" H: 5½"	4⅜"		
			30	3000K		639	85						
	HR-LED418-RIC	Remodel	35	3500K		681	80					L: 11⅞" W: 6⅜" H: 5⅝"	4⅜"
			40	4000K		815	75						
Non-IC	HR-LED418-N	New Conctruction	27	2700K	16W	846	85	120V 50/60Hz	700mA	L: 14½-24½" W: 6¾" H: 5½"	4⅜"		
			30	3000K		846	85						
	HR-LED418-R	Remodel	35	3500K		901	80					L: 11⅞" W: 6⅜" H: 5⅝"	4⅜"
			40	4000K		1135	75						
Non-IC	HR-LED418-N	New Conctruction Emergency Backup Battery	27	2700K	EM	16W	846	85	120V 50/60Hz	700mA	L: 14½-24½" W: 11⅞" H: 5½"	4⅜"	
			30	3000K			846	85					
			35	3500K			901	80					
			40	4000K			1135	75					

Example: **HR-LED418-NIC-27** or **HR-LED418-NIC-27-EM**

See individual housing spec sheets for complete information.

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585