



Color: Bronze

Weight: 218.3 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Construction

Description:

Steel pole 4" round 7 gauge 25 foot welded tenon square base

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

36,000 p.s.i. minimum yield.

Color:

Bronze powder coating

Height:

25 FT

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:

4"

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

Max EPA's/Max Weights:

70MPH 9.5 ft./380 lb.
 80MPH 6.3 ft./230 lb.
 90MPH 4.1 ft./150 lb.
 100MPH 2.6 ft./120 lb.
 110MPH 1.4 ft./70 lb.
 120MPH 0.5 ft./60 lb

Accessories:

Base/Cap: [BASE-R4](#)
 Anchor Bolts: [BOLT4/Z](#)

Other

Terms of Sale:

Pole Terms of Sale is available [online](#).


Technical Specifications (continued)

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

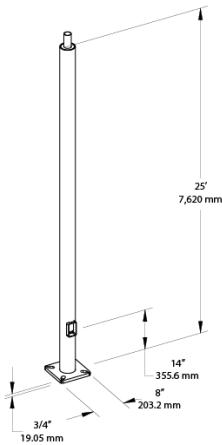

Features

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

Ordering Matrix

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	4	7	25	WT
R = Round		4 = 4"	7 = 7	10 = 10'	D2 = Drilled
TR = Taped Round		5 = 5"	11 = 11	15 = 15'	WT = Welded Tenon
		6 = 6"		20 = 20'	
		7 = 7"		25 = 25'	
		8 = 8"		30 = 30'	