


VERSABAR CORPORATION

E.M.T. and HydraZorb™ O.D. CLAMPS



VPT-1000 E.M.T. Series Clamps

Fits All 1-5/8" (41.3) Wide Channels

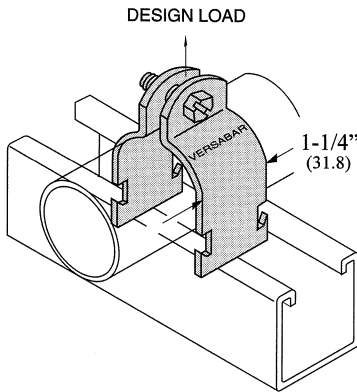

Part #	E.M.T. Size	Actual O.D. In. mm	Material Thickness	Wt / C Pr. Lbs. kg	Load Rating Lbs. kN
VPT-1037	3/8"	.577" (14.7)	16 ga. (1.5)	9.0 (4.1)	400 (1.8)
VPT-1050	1/2"	.706" (17.9)	16 ga. (1.5)	9.5 (4.3)	400 (1.8)
VPT-1075	3/4"	.922" (23.4)	16 ga. (1.5)	11.0 (5.0)	400 (1.8)
VPT-1100	1"	1.163" (29.5)	14 ga. (1.9)	15.0 (6.8)	600 (2.7)
VPT-1125	1-1/4"	1.510" (38.4)	14 ga. (1.9)	19.0 (8.6)	600 (2.7)
VPT-1150	1-1/2"	1.740" (44.2)	12 ga. (2.6)	27.0 (12.3)	800 (3.6)
VPT-1200	2"	2.197" (55.8)	12 ga. (2.6)	32.0 (14.5)	800 (3.6)


NOTE: E.M.T. over 2" has the same O.D. as rigid pipe, and requires a rigid or universal clamp of the same nominal size.

VHZ-100 Series O.D. & Copper Tube Isolating Clamp Assemblies

Fits All 1-5/8" (41.3) Wide Channels

Includes: Steel clamp* with welded stud,
Cushion insert with 275° F rating,
(useable down to -65°)
Nylon insert hex nut.

Finish: Zinc dichromate plated.*

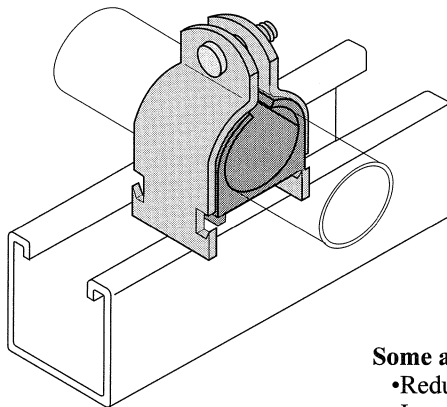

Part #	Fits: O.D. Size In. mm	Fits: Copper Tube Size In. mm	Wt / C Pr. Lbs. kg
VHZ-100025	1/4" (6.4)		10 (4.5)
VHZ-100031	5/16" (7.9)		11 (5.0)
VHZ-100037	3/8" (9.5)	1/4" (6.4)	11 (5.0)
VHZ-100050	1/2" (12.7)	3/8" (9.5)	12 (5.4)
VHZ-100062	5/8" (15.9)	1/2" (12.7)	13 (5.9)
VHZ-100075	3/4" (19.1)		20 (9.1)
VHZ-100087	7/8" (22.2)	3/4" (19.1)	21 (9.5)
VHZ-100100	1" (25.4)		28 (12.7)
VHZ-100112	1-1/8" (28.6)	1" (25.4)	29 (13.2)
VHZ-100125	1-1/4" (31.8)		31 (14.1)
VHZ-100137	1-3/8" (34.9)	1-1/4" (31.8)	40 (18.2)
VHZ-100150	1-1/2" (38.1)		40 (18.2)
VHZ-100162	1-5/8" (41.3)	1-1/2" (38.1)	45 (20.4)
VHZ-100175	1-3/4" (44.5)		43 (19.5)
VHZ-100200	2" (50.8)		48 (21.8)
VHZ-100212	2-1/8" (54.0)	2" (50.8)	53 (24.1)
VHZ-100225	2-1/4" (57.2)		60 (27.2)
VHZ-100251	2-1/2" (63.5)		56 (25.4)
VHZ-100262	2-5/8" (66.7)	2-1/2" (63.5)	53 (24.1)
VHZ-100300	3" (76.2)		65 (29.5)
VHZ-100312	3-1/8" (79.4)	3" (76.2)	63 (28.6)
VHZ-100362	3-5/8" (92.1)	3-1/2" (88.9)	78 (35.4)
VHZ-100412	4-1/8" (104.8)	4" (101.6)	90 (40.9)

Some advantages of Hydra-Zorb clamps over conventional pipe & tube clamps:

- Reduced noise, shock and vibration caused by fluid surges in tubes and hoses.
- Improved resistance to most fuels, oils, gases, greases, solvents, mineral acids, etc..
- Eliminates metal to metal contact.

* Also available in:
Stainless 304 & 316

Some advantages of Hydra-Zorb Brand isolator clamps over other brands:

- Superior salt spray results per ASTM B117-95. (No base metal corrosion after 72 hours).
- Steel clamp hardness rating of 73.3 HRB.