

Color: Bronze

Weight: 3.6 lbs

Project:	Type:
Prepared By:	Date:

Driver Info	LED Info
Type	Constant
120V	0.50A
208V	0.29A
240V	0.26A
277V	0.23A
Input Watts	31.2-62.1W
Watts	60/50/40/30W
Color Temp	3000/4000/5000K
Color Accuracy	81-84 CRI
L70 Lifespan	100,000 Hours
Lumens	4,405-9,353 lm
Efficacy	124.7-168.6 lm/W

Technical Specifications

Field Adjustability

Optical Field Adjustability:
90°, 75° and 55°

Field Adjustable:
Field Adjustable Light Output:
60W/50W/40W/30W (factory default 60W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default 4000K)

Compliance
UL Listed:
Suitable for wet locations

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:
Ingress protection rating of IP65 for dust and water

DLC Listed:
This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-PWNS5H

Electrical

Driver:
60W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.50A, 208V: 0.29A, 240V: 0.26A, 277V: 0.23A

50W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.40A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

40W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.32A, 208V: 0.20A, 240V: 0.17A, 277V: 0.16A

30W: Class 1, Constant Current, 120-277V, 50/60 Hz, 120V: 0.24A, 208V: 0.16A, 240V: 0.14A, 277V: 0.13A

Dimming Driver:
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:
11.93% at 120V, 7.39% at 277V

Power Factor:
98.8% at 120V, 94.1% at 277V

Surge Protection:
L/N-PE: 6kV, L-N: 6kV

Photocell:
Integrated photocell included with on/off switch

LED Characteristics

LEDs:
Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Color Consistency:
3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Performance
Lifespan:
100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Performance Data:
[Click here for the X22-60 performance data](#)

Construction
Cold Weather Starting:
The minimum starting temperature is -30°C (-22°F)

Need help? Tech help line: (888) 722-1000 Email: techsupport@rablighting.com Website: www.rablighting.com

Copyright © 2025 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Page 1 of 3

Technical Specifications (continued)

Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

Housing:

Die-cast aluminum

Lens:

Tempered glass

Effective Projected Area:

1 Fixture: 0.205 ft²

2 Fixtures at 90°: 0.427 ft²

2 Fixtures at 180°: 0.409 ft²

3 Fixtures at 90°: 0.632 ft²

4 Fixtures at 90°: 0.632 ft²

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation**Mounting:**

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Trunnion kit is included.


Other**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

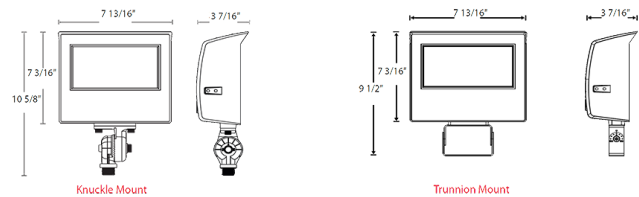

Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family		Wattage	Color Temp	Mounting	Finish	Beam Angle	Driver	Options
X22	–	60		Blank				
		35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000/4000/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

X22-20 & X22-35: Knuckle mount installed with yoke mount included.
X22-60 & X22-80: Knuckle mount installed with trunnion mount included.
X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.